

LP Gas Hose Reels

| Home Delivery Trucks | Dispensing Systems | Fueling Vehicles |
| Filling Stationary and Portable Cylinders |



**You Can't Buy
A Better Reel.**

Family owned and operated since 1933

Series SPBN800/SPB800

To handle 3/4" or 1" I.D. hose.

- Standard hose reel is steel construction, painted graphite. Stainless steel construction is available.
- SPB800 only:** Aluminum construction is also available. "SB" prefix denotes polished aluminum construction, offering both reduced weight and superior corrosion resistance compared to standard steel construction.
- Rollformed frame for heavy-duty applications must be specified.
- Non-sparking ratchet locks reel, and declutching arbor prevents damage from reverse winding.
- Standard inlet: 90° ball bearing swivel joint, 1" female NPT threads. Standard outlet: 1" female NPT threads. Other sizes and/or threads can be furnished and must be specified.
- Pressures to 350 psi (24 bar). Temperatures from -40°F to +350°F (-40°C to +177°C). Consult factory for other pressures and temperatures.
- Supplied 4-way roller assembly. Specify roller position.



Series SPBN800
Top wind configuration shown



Series SPB800
Standard configuration shown

PARTS DRAWING: SERIES SPBN800 – ISO 81; SERIES SPB800 – ISO 42

Model Number	Hose Capacity of Reel feet m				Approx. Weight lb. kg		Roller Assy Supplied on Std. Models	Reel Dimensions*** in. mm									
	I.D. in. mm	1/2 13	3/4 19	1 25	NET	SHIP		A	B	C	D	E	F	G	H	X	Y
	O.D. in. mm	.94 24	1.25 33	1.5 40													
SPBN816-19-20-10.5J	35 11	25 8	15 5	75 34	98 44	N204	10 254	4 102	10.5 267	12 305	20.75 527	16.12 409	20 508	10.62 270	8 203	10 254	
SPBN816-23-24-10.5J	50 15	50 15	25 8	87 39	116 53	N204	10 254	4 102	10.5 267	12 305	24 610	16.12 409	24 610	12.62 321	8 203	10 254	
SPBN816-25-26-10.5B	65 20	60 18	35 11	96 44	131 59	N204	10 254	4 102	10.5 267	12 305	25.5 648	16.12 409	26 660	13.62 346	8 203	10 254	
SPBN818-25-26-10.5B	60 18	70 21	50 15	102 46	137 62	N206	12 305	6 152	10.5 267	12 305	25.5 648	18.12 460	26 660	13.62 346	10 254	10 254	
SPB816-19-20-10.5J	35 11	25 8	15 5	75 34	98 44	R204	9.25 235	4 102	10.5 267	20.5 521	18.75 476	16.88 429	19.75 502	10.38 264	4.5 114	14.75 375	
SPB816-23-24-10.5J	50 15	50 15	25 8	87 39	116 53	R204	9.25 235	4 102	10.5 267	24.5 622	22.75 578	16.88 429	23.88 607	12.5 318	4.5 114	20 508	
SPB816-25-26-10.5B	65 20	60 18	35 11	96 44	131 59	R204	9.25 235	4 102	10.5 267	26.25 667	24.75 629	16.88 429	25.88 657	13.5 343	4.5 114	21.75 552	
SPB818-25-26-10.5B	60 15	70 15	50 8	102 39	137 53	R206	11.25 286	6 152	10.5 267	26.25 667	24.75 629	18.88 480	25.88 657	13.5 343	6.5 165	21.75 552	
SPB816-30-31-15.5G	110 34	75 23	40 12	124 56	159 72	R204	9.25 235	4 102	15.5 394	30.5 775	28.75 730	16.88 429	31.38 797	17 432	4.5 114	25.25 614	
SPB820-25-26-10.5A	75 23	85 26	75 23	131 59	166 75	R308	13.25 337	8 203	10.5 267	27 686	24.75 629	21.62 549	25.88 657	13.5 343	8.5 216	21.75 552	
SPB820-30-31-15.5A	75 23	100 30	100 30	137 62	172 78	R308	13.25 337	8 203	15.5 394	30.5 775	28.75 730	21.62 549	31.38 797	17 432	8.5 216	25.25 641	

Notes:

- Specifications subject to change.
- Others sizes, from standard components, available on request.
- For optional locations of joint and spring motor placement – consult factory.

- Be sure to check dimensions and weights prior to ordering.

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.
***X, Y indicate mounting holes.

Available Roller Positions




SR (STD)




VR (OPT)



TR (OPT)

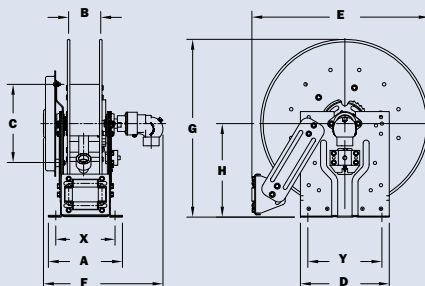

Series SPBN800 - Narrow Frame

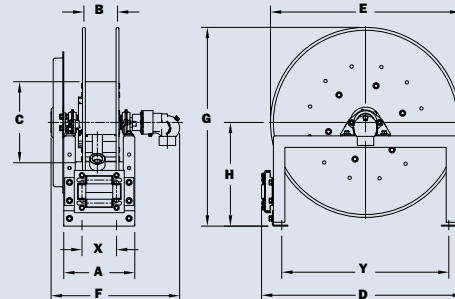

Series SPB800 - Rollformed Frame

You Can't Buy A Better Reel.

Find reels for every need.


Learn more about all of our reels, including specs, drawings, and even how to select the right reels and accessories for your industry.



Ordering & Accessory Guide

Learn more about:


- Selecting the right reel
- Reel components
- Available accessories
- How to spec and order reels and accessories
- Ordering options
- Hannay Reels policies



Industrial Hose Reels

Includes specs and information on:


- High pressure spring rewind reels
- Compact manual rewind reels
- Power rewind reels
- Portable storage reels
- Hose assemblies



Petroleum Hose Reels

Comprehensive information on:

- Manual or power rewind reels
- Power rewind reels for inverted installation
- Single wrap power rewind reels
- Guide for inverted installation



Cable Reels

Find out more about:

- Manual and power rewind reels
- Storage reels
- Reels for live electric cable
- Portable reels
- Static and truck grounding reels

View all our reel catalogs online at hannay.com



Family owned and operated since 1933, Hannay Reels is the world leader in both OEM and aftermarket applications. Hannay offers thousands of standard hose reel and cable reel models, as well as unmatched custom capabilities. We can easily and affordably customize a reel to meet your exact specifications – built to last, delivered fast. Additional catalogs are available through your local Hannay Reels dealer or online at hannay.com.



553 State Route 143 | Westerlo, New York 12193
Email: reels@hannay.com | hannay.com



All Hannay reels are constructed of quality heavy gauge steel (optional aluminum or stainless steel also available on most models).

Phone: **518-797-3791**
Toll Free: **1-877-467-3357**

Domestic FAX: **1-800-733-5464**
International FAX: **518-797-3259**

Form H-0506-LP REV 8-21